

**Description**


Local Area Network Cable

Cat. 5e F/UTP 4x2xAWG24/1 PVC+PE



**Data Sheet**

**LAN5412G**

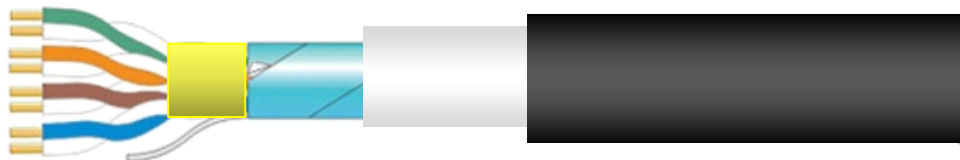

Ø	0,51	1,00		6,20	7,40
	(Cu)	(PE)	(Pet)	(Al/Pet)	(PVC)

**Class CPR acc. to UE 305/2011 (DoP)**

Fca

The cable can be used in the field of application of the Construction Product Regulation (DoP) UE nr. 305/ 2011 for the class of performance specified on the related product label.

**Standards**

ISO/IEC 11801 Class D	EN 50288-2-1	EN 50173	IEC 61156
EIA-TIA 568	CEI-UNEL 36762		

**Reaction to Fire**

EN50575

**Application**

Primary (Campus), Secondary (Riser), Tertiary (Horizontal)

IEEE 802.3: 10Base-T; 100Base-T; 1000Base-T

IEEE 802.5 16 MB: ISDN; TPDDI; ATM

Power over Ethernet (PoE)/PoE+

**Construction data**

4 foil screened pairs with conductor of bare copper	(Cu)	Ø 0,51	mm
Insulation of solid Polyethylene	(PE)	Ø 1,00	mm
Polyester film spirally wrapped	(Pet)		

**Composition**

Twisted pairs, coloured by Standard TIA-568A

Drain wire of tinned copper			
Aluminum/Polyester tape spirally wound	(Al/Pet)		
Inner sheath of Polyvinylchloride white (PVC)	(PVC)	6,20	mm
Outer sheath of Polyethylene - black	(PE)	Ø 7,40	mm

Printed each meter by yellow ink-jet :

**CAVEL LAN 541 2G MADE IN ITALY CAT 5E F/UTP 4x2xAWG24 Euroclass Fca ISO-IEC 11801 EN50173  
CEI-UNEL 36762 C-4 (U0 = 400V) ggaan m**

(ss=week, aa=year) (m=meter marking)

**ITALIANA CONDUTTORI s.r.l.**

Viale Zanotti 90 I - 27027 Gropello Cairoli  
Tel +39-382.815150 Fax +39-0382.814212

**Date**

10/11/2020

**Responsible**

A. Bergaglio

## Description

Local Area Network Cable

Cat. 5e F/UTP 4x2xAWG24/1 PVC+PE



## Data Sheet

LAN5412G

## Physical data

Weight of copper conductors	15,60	kg/km
Total weight of cable	46,41	kg/km
Minimum bending radius x1/n	25/50	mm
Maximum tensile strength during the installation	100	N
Installation temperature	0 / +50	°C
Operating temperature	-20 / +60	°C

## Electrical data

Characteristic impedance	1 - 100 MHz	100 ± 5	Ohm
Capacitance of Twisted Pair (@800Hz)		48	pF/m
Velocity Ratio		67 %	
DC Conductor Resistance		95	Ohm/km
Loop resistance		190	Ohm/km
Insulation resistance		> 2000	MOhm/km
Sheath Insulation Voltage (DC, 1 min)		3	kV
Coupling Attenuation		> 45	dB

## Screening Attenuation (SA)

30 - 100 MHz &gt; 50 dB

## Transfer Impedance (Zt)

1 MHz	< 22 mOhm/m
10 MHz	< 10 mOhm/m
30 MHz	< 26 mOhm/m

## Transmission-Characteristic (at 20°C)

Frequency [MHz]	Attenuation [dB/100m]	RL [dB]	NEXT [dB]	ACR-N [dB/100m]
1	1,90	20,00	71,00	69,10
10	6,00	25,00	56,00	50,00
20	8,50	25,00	51,00	42,50
31,2	10,70	24,00	49,00	38,30
62,5	15,70	22,00	44,00	28,30
100	19,80	20,00	41,00	21,20

## ITALIANA CONDUTTORI s.r.l.

Viale Zanotti 90 I - 27027 Gropello Cairoli  
Tel +39-382.815150 Fax +39-0382.814212

## Date

10/11/2020

## Responsible

A. Bergaglio