

Description


Local Area Network Cable

Cat. 7A S/FTP 4x2xAWG23/1 LSZH
1200MHz - 40% Braid Coverage



Data Sheet

LAN7A12004574ZHA

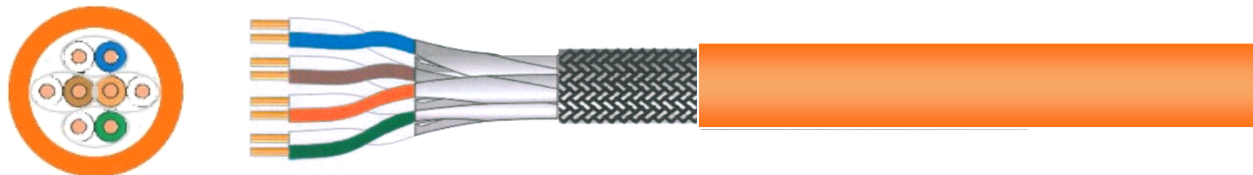

Ø	0,57	1,35		8,00
	(Cu)	(PEG)	(Al/Pet)	(LSZH)

Class CPR acc. to UE 305/2011 (DoP)

Dca s1a,d1,a1

The cable can be used in the field of application of the Construction Product Regulation (DoP) UE nr. 305/2011 for the class of performance specified on the related product label.

Standards

ISO/IEC 11801 Cl II (up to 1,2 GHz)	EN50288-12-1 (up to 1,2 GHz)	EN50173	EIA-TIA 568
CEI-UNEL 36762			

Reaction to Fire

EN50575

Application

Primary (Campus), Secondary (Riser), Tertiary (Horizontal)
Up to Class FA (1000 MHz), up to 100 m (Channel)
Over 1000 MHz, up to 50 m (Channel)
IEEE 802.3: 10Base-T; 100Base-T; 1000Base-T; 10GBase-T; 25GBase-T
IEEE 802.5: ISDN; TPDDI; ATM; CATV; Broadband Video; PoE/PoE+
Indoor + Outdoor Installation

Construction data

Inner conductor of plain copper	(Cu)	Ø 0,57	mm
Insulation of physical foam Polyethylene	(PEG)	Ø 1,35	mm
Al/Pet foil shielded pairs, PIMF mode	(Al/Pet)		

Composition

Twisted pairs, coloured by Standard TIA-568A

Braid of tinned copper wires	(CuSn)		
Braid Optical Coverage		41	%
Outer sheath of Thermoplastic material - orange (RAL 2003) - halogen-free, low smoke, flame retardant and UV-resistant	(LSZH)	Ø 8,00	mm

Printed each meter by blue ink-jet :

CAVEL LAN 7A 1200 4574 ZHA MADE IN ITALY CAT 7A S/FTP 4x2xAWG23 Euroclass Dca,s1a,d1,a1 ISO-IEC 11801 EN50173 CEI-UNEL 36762 C-4 (U0 = 400V) gggaa(n) m

(gggaan=batch number m=meter marking)

ITALIANA CONDUTTORI s.r.l.

Viale Zanotti 90 I - 27027 Gropello Cairoli
Tel +39-382.815150 Fax +39-0382.814212

Date

14/07/2023

Responsible

A. Bergaglio

Description

Local Area Network Cable

Cat. 7A S/FTP 4x2xAWG23/1 LSZH
1200MHz - 40% Braid Coverage

Data Sheet

LAN7A12004574ZHA

Physical data

Weight of copper conductors	24,40	kg/km
Total weight of cable	66,40	kg/km
Minimum bending radius x1/n	40/80	mm
Max.Tensile Strength	150	N
Installation temperature	0 / +50	°C
Operating temperature	-20 / +80	°C

Electrical data

Characteristic impedance	1 - 100 MHz	100 ± 5	Ohm
Capacitance of Twisted Pair (@800Hz)		43	pF/m
Velocity Ratio		77 %	
DC Conductor Resistance		73	Ohm/km
Loop resistance		146	Ohm/km
Insulation resistance		> 5000	MOhm x km
Sheath Insulation Voltage (DC, 1 min)		1	kV
Coupling Attenuation		> 45	dB

Screening Attenuation (SA)

30 - 100 MHz	> 80 dB
100 - 1000 MHz	> 85 dB

Transfer Impedance (Zt)

1 MHz	< 5 mOhm/m
10 MHz	< 3 mOhm/m
30 MHz	< 3 mOhm/m

Transmission-Characteristic (at 20°C)

Frequency [MHz]	Attenuation [dB/100m]	RL [dB]	NEXT [dB]	ACR-N [dB/100m]	ACR-F [dB]
1	2,10		105,50	103,40	95,00
4	3,70	23,00	96,40	92,70	95,00
10	5,80	25,00	90,40	84,60	95,00
20	8,20	25,00	85,90	77,70	95,00
31,25	10,30	25,00	83,00	72,70	95,00
62,5	14,60	23,60	78,50	63,90	90,00
100	18,50	22,20	75,40	56,90	90,00
155,5	23,20	20,90	72,50	49,30	85,00
250	29,70	19,40	69,40	39,70	80,00
500	40,40	17,60	65,60	25,20	75,00
600	47,10	16,80	63,70	16,60	75,00
1000	61,90	15,20	60,40	-1,50	65,00
1200	68,40	14,70	59,20	-9,20	65,00

Connectors

KJ6A7HQ	Socket RJ45 S/FTP shielded, Cat.6A e 7 toolless Alu, Socket RJ45
MGN7A45	Socket RJ45 S/FTP shielded, Shielded, crimp PS-GG45 Nexans, Socket RJ45 -
MTS7A45	Socket RJ45 S/FTP shielded, Shielded, crimp PS-TERA™ Siemon, Socket RJ45 -
PF-24PN	Patch panel, ?Pannello 19" 24 Porte Vuoto per RJ45 FTP 1 HE con, Patch panel UTP -

ITALIANA CONDUTTORI s.r.l.

Viale Zanotti 90 I - 27027 Gropello Cairoli
Tel +39-382.815150 Fax +39-0382.814212

Date

14/07/2023

Responsible

A. Bergaglio