

**Description**


Security video cable - 75 Ohm with 2 electrical wires 0,5 mm<sup>2</sup>

LSZH UV resistant security video cable



**Data Sheet**

**VSHD40205**



Ø

6,70 x 5,80

(LSZH)

**Class CPR acc. to UE 305/2011 (DoP)**

**Eca**

The cable can be used in the field of application of the Construction Product Regulation (DoP) UE nr. 305/2011 for the class of performance specified on the related product label.

Attached Data Sheet	Sheath Colour
VSHD40	blue (RAL 5015)
CE22	black
CE23	red

Outer sheath of Thermoplastic material - blue (RAL 5015) - (LSZH) Ø 6,70 x 5,80 ± 0,10 mm  
 halogen-free, low smoke, flame retardant and UV-resistant  
 Printed each meter by blue ink-jet :

**CAVEL VS HD 40205 LSZH MADE IN ITALY 1000 V 75 Ohm Euroclass Eca gggaan - m**

(gggaan=batch number m=meter marking)

**Physical data**

Weight of copper conductors	13,60	kg/km
Total weight of cable	44,17	kg/km
Minimum installation temperature	-5	°C
Operating temperature	-25 / +80	°C

**Electrical data**

Loop Resitance electrical wires	74	Ohm/km
Sheat Insulation voltage (spark test)	1	kV

**Connectors**

- BNCC40** Series BNC Compression, BNC Compression, for OUTDOOR installation
- BNCCEM3C** Series BNC Compression, BNC Compression, for OUTDOOR installation

**ITALIANA CONDUTTORI s.r.l.**

Viale Zanotti 90 I - 27027 Gropello Cairoli  
 Tel +39-382.815150 Fax +39-0382.814212

**Date**

**29/02/2016**

**Responsible**

**Alberto Scardovi**

## Description

Security video cable - 75 Ohm

LSZH UV resistant security video cable

Coaxial Cables

CAVEL®

since 1968

## Data Sheet

VSHD40

VSHD40205



Ø	0,42	1,90	2,07	2,47	3,60
	(Cu)	(PEG)	(Al/Pet/Al/Sur)	(CuSn)	(LSZH)

## Class CPR acc. to UE 305/2011 (DoP)

Dca s2,d2,a1

The cable can be used in the field of application of the Construction Product Regulation (DoP) UE nr. 305/2011 for the class of performance specified on the related product label.

## Reaction to Fire

EN 50575

## Construction data

Inner conductor of plain copper	(Cu)	Ø 0,42 ± 0,02	mm
Dielectric of physical foam polyethylene	(PEG)	Ø 1,90 ± 0,10	mm
Aluminum/Polyester/Aluminum/Surlyn tape longitudinally overlapped and bonded to the dielectric	(Al/Pet/Al/Sur)		
Braid of tinned copper wires	(CuSn)		
Braid optical coverage (IEC 96-1)		70	%
Diameter over Braid		Ø 2,47	mm
Outer sheath of Thermoplastic material - blue (RAL 5015) - halogen-free, low smoke, flame retardant and UV-resistant	(LSZH)	Ø 3,60 ± 0,10	mm

Printed each meter by blue ink-jet :

**CAVEL VS HD 40 LSZH MADE IN ITALY 75 Ohm Euroclass Dca s2,d2,a1 EN50117-2-5 CEI-UNEL 36762 C-4 (U0 = 400V) gggaa(n) m**

(ggg=day)(aa=year)(n=batch) (m=meter marking)

## Physical data

Weight of copper conductors	5,52	kg/km
Total weight of cable	16,08	kg/km
Minimum bending radius (single/repeated bending)	15/30	mm
Maximum cable pulling strength	50	N
Minimum installation temperature	-5	°C
Operating temperature	-25 / +80	°C

## Electrical data

Characteristic impedance	200 MHz	75 ± 3	Ohm
Capacitance (@1kHz)		55 ± 3	pF/m
Velocity Ratio		82 %	
Inner conductor resistance		135	Ohm/km
Outer conductor resistance		30	Ohm/km
Loop resistance		165	Ohm/km
Sheat Insulation voltage (spark test)		2,50	kV
Maximum current		1	A

## ITALIANA CONDUTTORI s.r.l.

Viale Zanotti 90 I - 27027 Gropello Cairoli  
Tel +39-382.815150 Fax +39-0382.814212

## Date

29/02/2016

## Responsible

Alberto Scardovi

**Description**

Security video cable - 75 Ohm

LSZH UV resistant security video cable



**Data Sheet**

**VSHD40**

VSHD40205

Maximum Operating Range analog/digital

400 / 80

m

Structural return loss (SRL)

5 - 470 MHz	>29 dB
470 - 1000 MHz	>27 dB
1000 - 2000 MHz	>22 dB
2000 - 3000 MHz	>18 dB

Screening Attenuation (SA)

SA-Class A

30 - 1000 MHz	>85 dB
1000 - 2000 MHz	>85 dB
2000 - 3000 MHz	>75 dB


Attenuation (at 20°C )

Frequency [MHz]	Attenuation [dB/100m]	Frequency [MHz]	Attenuation [dB/100m]
2	2,40	5	3,80
3	2,90	200	21,20
4	3,40	862	45,10

**Attenuazione di schermatura / Screening Attenuation**

**Cavo classe A / A Class Cable**

Cavo tipo / Cable type : VS HD 40

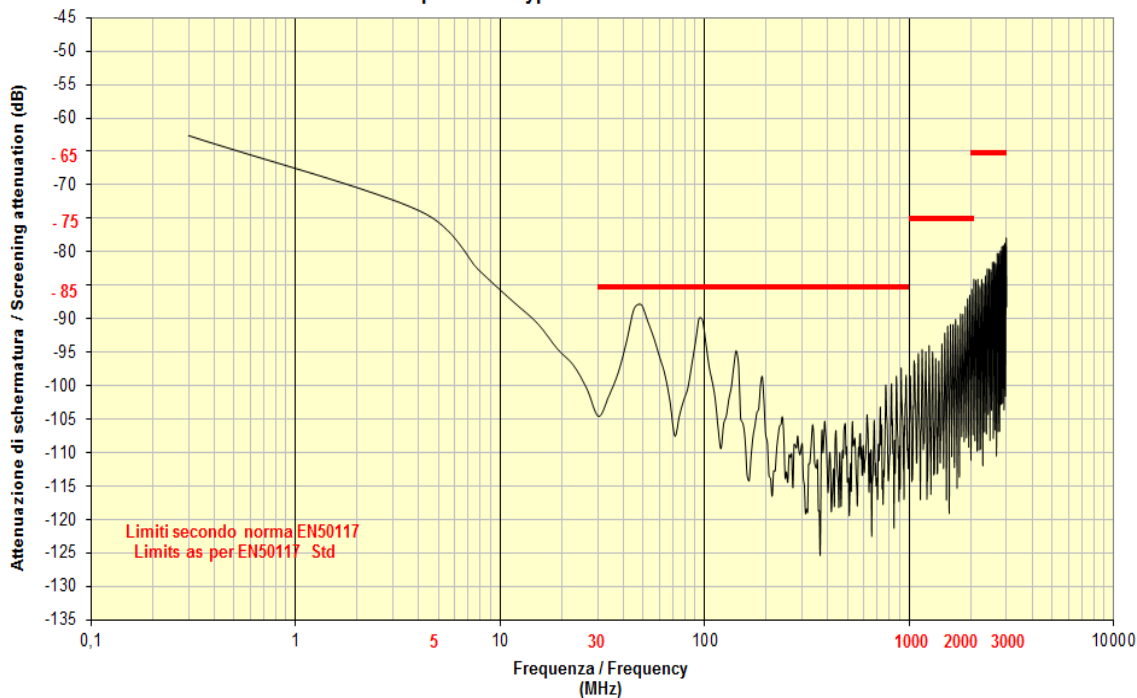

**Connectors**

- BNCC40** Series BNC Compression, BNC Compression, for OUTDOOR installation
- BNCCEM3C** Series BNC Compression, BNC Compression, for OUTDOOR installation

**ITALIANA CONDUTTORI s.r.l.**

Viale Zanotti 90 I - 27027 Gropello Cairoli  
Tel +39-382.815150 Fax +39-0382.814212

Date

29/02/2016

Responsible

Alberto Scardovi

**Description**Electrical wire 0,5 mm<sup>2</sup>**Data Sheet****CE22**  
VSHD40205

16x0,193



Ø	0,80	1,80
	(Cu)	(LSZH)

**Construction data**

Electrical conductor of stranded bare copper wires	0,50 mm <sup>2</sup>	(Cu)	16x0,193	Ø 0,80	mm
Outer sheath of Thermoplastic material - black - halogen-free, low smoke, flame retardant and UV-resistant		(LSZH)		Ø 1,80	mm

**Physical data**

Weight of copper conductors	4,10	kg/km
Total weight of cable	7,60	kg/km

**Electrical data**

Conductor resistance @ 20°C	39	Ohm/km
Maximum current (I <sub>eff</sub> )	6	A

**ITALIANA CONDUTTORI s.r.l.**Viale Zanotti 90 I - 27027 Gropello Cairoli  
Tel +39-382.815150 Fax +39-0382.814212**Date**

29/02/2016

**Responsible**

Alberto Scardovi

**Description**Electrical wire 0,5 mm<sup>2</sup>**Data Sheet****CE23**  
VSHD40205

16x0,193



∅	0,80	1,80
	(Cu)	(LSZH)

**Construction data**

Electrical conductor of stranded bare copper wires 0,50 mm <sup>2</sup>	(Cu)	16x0,193	∅ 0,80	mm
Outer sheath of Thermoplastic material - red (RAL 3000) - halogen-free, low smoke, flame retardant and UV-resistant	(LSZH)		∅ 1,80	mm

**Physical data**

Weight of copper conductors	4,10	kg/km
Total weight of cable	7,60	kg/km

**Electrical data**

Inner conductor resistance	39	Ohm/km
Maximum current	6	A

**ITALIANA CONDUTTORI s.r.l.**Viale Zanotti 90 I - 27027 Gropello Cairoli  
Tel +39-382.815150 Fax +39-0382.814212**Date**

29/02/2016

**Responsible**

Alberto Scardovi